



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification 6 :	A1	(11) International Publication Number: WO 98/49643
G06F 17/60		(43) International Publication Date: 5 November 1998 (05.11.98)

(21) International Application Number: PCT/US98/08236	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 24 April 1998 (24.04.98)	
(30) Priority Data: 08/845,722 25 April 1997 (25.04.97) US	
(71) Applicant: POSTX CORPORATION [US/US]; 1688 Dell Avenue, Campbell, CA 95008 (US).	
(72) Inventors: VENKATRAMAN, R., C.; 1031 Harlan Drive, San Jose, CA 95129 (US). CHEN, Vincent, Min-Hao; 3314 Marchese Court, Santa Clara, CA 95051 (US). NANJA, Sekaran; 5824 Chamberlin Drive, San Jose, CA 95118 (US). GUJARATHI, Haresh; Apartment E-204, 655 South Fair Oaks Avenue, Sunnyvale, CA 94086 (US).	
(74) Agents: JAKOPIN, David, A. et al.; Cushman Darby & Cushman, IP Group of Pillsbury Madison & Sutro, LLP, 1100 New York Avenue N.W., Washington, DC 20005 (US).	

(54) Title: E-MAIL PROGRAM CAPABLE OF TRANSMITTING, OPENING AND PRESENTING A CONTAINER HAVING DIGITAL CONTENT USING EMBEDDED EXECUTABLE SOFTWARE

## (57) Abstract

An e-mail message enhancement apparatus is preferably implemented through a sequence of program instructions. On the sender side, creation software implements a data format that allows for differing types of content, such as visual images, audio, multimedia, and functional attributes such as links to a sender's home page on the world wide web. Furthermore, in addition to such content in the e-mail message, there is included header information, including the e-mail address of the sender, and recipient executable embedded software that ensures the recipient will be able to view contents and perform the functional attributes that make up the e-mail message.

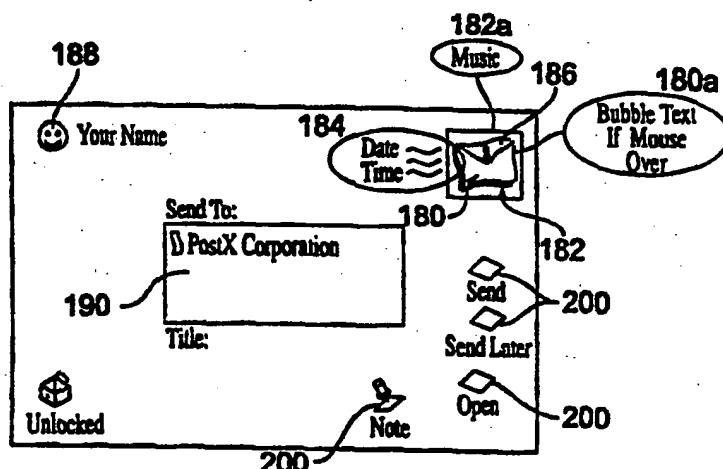

DA

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**E-MAIL PROGRAM CAPABLE OF TRANSMITTING,  
OPENING AND PRESENTING A CONTAINER HAVING  
DIGITAL CONTENT USING EMBEDDED EXECUTABLE SOFTWARE**

5

**Field of the Invention**

The present invention relates to an e-mail software program enhancement, and, more particularly, an e-mail program capable of transmitting, opening and presenting a container having digital content (e.g. visual images, audio) using embedded executable software.

10

**Background of the Invention**

Conventional e-mail systems transmit textual messages from a sender to a receiver. It is also customary to send attachments with messages, the attachments containing files that the 15 sender desires forwarding to the receiver.

15

Despite the vast usage of e-mail and e-mail systems, certain drawbacks still exist. Among these drawbacks include lack of privacy and verification of message receipt. While encryption systems exist that can provide for privacy and verification of message receipt, such encryption systems become tedious to properly use, and are, therefore, avoided in many circumstances due 20 to the fact that they are difficult to use. Since typical e-mails are not secure in a heterogeneous environment and there is no verification of message receipt, e-mail messages are typically used only for low priority communications.

25

Furthermore, messages that are sent via one e-mail platform cannot be reliably transmitted to another e-mail platform and still ensure that different types of content appear as desired. For this and other reasons, e-mail messages typically lack interesting different types of content, such as visual images, audio, multimedia, and other functional attributes, such as, for instance, links to a sender's home page on the world wide web. Accordingly, since only text based content can be easily transmitted and received in a reliable manner, most e-mail transmissions tend to 30 use textual content that looks similar, with attachments of files that are similarly uninteresting.

30

As a result, a more robust enhancement to conventional e-mail platforms is needed in order to reliably overcome the above mentioned drawbacks.

35

**Summary of the Invention**

It is an object of the present invention to provide an e-mail message enhancement apparatus

that allows for privacy and verification of message receipt.

It is another object of the present invention to provide an e-mail message enhancement apparatus that can be reliably transmitted from one e-mail platform to another e-mail platform.

It is a further object of the present invention to provide an e-mail message enhancement apparatus that allows for the transmission, reception and layout of interesting different types of content.

The above objects of the present invention, among others, are provided by the present invention through the e-mail message enhancement apparatus which is preferably implemented through a sequence of program instructions and achieved as attachments to e-mail message. On the sender side, creation software implements a data format that allows for differing types of digital content. Furthermore, in addition to such content in the e-mail message, there is included attachments, header information, including the e-mail address of the sender, and recipient executable embedded software that ensures the recipient will be able to view contents and perform the functional attributes that make up the e-mail message.

In a preferred embodiment of the invention, the executable software that is transmitted as part of the e-mail message is written using Java programming language and contains a self-opening message feature, such that the container automatically opens and is initially viewed with all of the desired content appearing. Thereafter, depending upon the content originally included by the sender, and the action taken on the part of the recipient, different portions of the content and functional attributes are highlighted. Such content and functional attributes will be viewable, regardless of the e-mail platform of the recipient, due to the inclusion of the executable software in the e-mail message itself that is transmitted.

Through the use of a data structure that allows for a plurality of component objects to be included in a single e-mail message, as well as a plurality of sub-component objects to be associated with each component object, an e-mail message having robust content and functional attributes can be achieved.

In a specific embodiment of the invention, the e-mail message that is transmitted has a plurality of component objects, with one of the component objects representing the front face of an envelope, and different other component objects including, but not limited to, recipient address, sender address, stamp, digital time stamp, and an envelope open attribute so that the e-mail message appears on the recipient's computer screen like an envelope. When the e-mail message is opened using the envelope open attribute, or subsequently closed, verification of message receipt is automatically forwarded back to the original sender. In a specific form of this embodiment, both sides of the envelope can be represented, with another component object representing the back side of the envelope and the envelope open attribute that allows for attachments or messages within the envelope to be viewed appearing on the back side of the envelope.

In another specific embodiment of the present invention, the e-mail message that is transmitted has a plurality of component objects, with one of the component objects representing

the front face of a postcard, and different other component objects represented on the back face of the postcard being the recipient address, sender address, stamp, senders letter and digital time stamp.

Still furthermore, the size and shape of component objects can be varied as desired by the  
5 sender, overlap with each other and vary in number within a single e-mail message. Accordingly, the appearance of the e-mail message can be varied as desired by the sender.

#### Brief Description of the Drawings

The structural and functional aspects of the invention will become understood by those  
10 skilled in the art by reference to the following detailed description when taken in conjunction with the appended drawings, in which:

- FIG. 1 is a diagram illustrating an implementation of the invention in a computer network;
- FIG. 2 illustrates an e-mail message format for an enhanced e-mail message according to the invention;
- 15 FIG. 3 illustrates the format of an envelope data structure according to the invention;
- FIG. 4 illustrates the contents of an envelope header in an envelope data file according to the invention;
- FIG. 5 illustrates envelope data;
- FIG. 6 is a diagram illustrating a component objects file according to the invention;
- 20 FIG. 7 illustrates the contents of a component object header data structure according to the invention;
- FIG. 8 illustrates the contents of a component object data structure according to the invention;
- FIG. 9 illustrates the contents of a component object property data structure according to the  
25 invention;
- FIGs. 10A and 10B illustrate the process of creating and sending an enhanced e-mail message according to the invention;
- FIG. 11 is a diagram illustrating the process of receiving an enhanced e-mail message according to the invention;
- 30 FIG. 12 illustrates an enhanced e-mail message initial container display according to the invention;
- FIG. 13 is a diagram illustrating the process of handling a user action according to the invention;
- FIG. 14 is a diagram illustrating the process of conditional display of contents if conditions  
35 set by the sender according to the invention;

FIG. 15 is a diagram illustrating the process of sending return receipt e-mail messages according to the invention;

FIGs. 16A, 16B1-16B2 and 16C1-16C4 illustrates example data structures for an envelope container having a company logo as an object component according to the invention; and

5 FIGs. 17A-17D illustrate views and actions that result from the data structures such as set forth in FIGS. 16A, 16B1-16B2 and 16C1-16C4.

#### Detailed Description of the Preferred Embodiment

10 FIG. 1 illustrates a computer network 10 which operates upon the e-mail enhancement program according to the present invention. A sender computer 20 communicates with a recipient computer 30 through a network 12. Of course, additional computers, represented as computers 32(1), 32(2) ...32(n) can also be connected to the network 12 and be used to send and receive e-mail messages.

15 Sender computer 20 contains, as is known, a computing portion 22 that contains, as is known, I/O 22A, memory 22B and some type of processor 22C, which can be in the form of, for instance, a microprocessor. Attached to the computing portion 22 is a keyboard 24, a mouse 26, and a display 28. Similarly, recipient computer 30 contains, as is known, a computing portion 32 that contains, as is known, I/O 32A, memory 32B and some type of processor 32C, which can be in the form of, for instance, a microprocessor. Attached to the computing portion 20 32 is a keyboard 34, a mouse 36, and a display 38.

20 Creation executable software according to the present invention contains sequences of program instructions that allow for the creation of an enhanced e-mail message according to the present invention, as well as the transmission of the created message through the network to the recipient. Recipient executable software according to the present invention contains a different sequence of program instructions that allow for the receipt, and thus visual, audible and functional attributes to be obtained by the recipient.

25 There currently exist two different embodiments of the software according to the present invention. In a first, version of the software, the creation and recipient executable software is loaded into the memory 22B of the sender computer 20. When this embodiment of the software is used, the e-mail message structure contains, as described hereinafter, a portion that attaches the recipient executable software to the e-mail message transmitted from the sender to the recipient. So long as the recipient computer 30 can operate as a Java virtual machine, the recipient computer 30 will receive the e-mail message containing the recipient executable software, preferably written in Java, and use that recipient executable software to display the enhanced e-mail message on the display 38 of the recipient computer 30.

5 In a second, native version of the software, the creation executable software is loaded into the memory 22B of the sender computer 20, and the recipient executable software is loaded into the memory 32B of the recipient computer 32. In this embodiment, the transmitted e-mail message will not contain the recipient executable software, since the recipient executable software will already reside on the recipient computer 30.

10 It should of course be understood that the present invention is not to be interpreted in a manner that limits the scope of the present invention to the specific sequence of program instructions. The descriptions given herein provide the teachings necessary to implement the present invention in different programming languages and on different operating system platforms.

15 FIGs. 2-9 will now be described, which figures illustrate the data format which the Java executable software version implements. Those specific fields which are believed to be self explanatory will not be described in detail. Before describing this data format in further detail, however, reference is made to FIG. 12, which illustrates an enhanced e-mail initial container display 100 made up of component objects 102, 104, 106 and 108. It should be noted that the number of component objects in any initial display can be varied, as can the size and shape of each of the component objects. Also, it should be noted that the component object is also referred to in certain of the drawings and potentially the specification text as a "Vixel", which term is a trademark of PostX Corporation. The initial display 100 provides a display that is also referred to in certain of the drawings and potentially the specification text as "Active View", which term is a trademark of PostX Corporation.

20 FIG. 2 illustrates the e-mail message format for the enhanced e-mail message according to the present invention. This data format 40 includes a native stub code 40A that provides for a self-opening envelope at the present time, despite the fact that Java classes are not presently defined so that self-opening can occur without the use of such a native stub. Thereafter, data 25 40B indicates the number of recipient executable files, which files then follow as files 1, 2...n, which are labeled as 40C-1, 40C-2...40C-n, the number of which will be determined by the different number and type of images, sounds, and functional attributes that the sender inserts into the enhanced e-mail message that is sent. Container/envelope data file 40D follows 30 thereafter, which file is further described with reference to FIG. 3.

35 As illustrated in FIG. 3, the envelope data file 40D contains an envelope header 42, the contents of which are provided in detail in FIG. 4. Of note with respect to the contents of the FIG. 4 header is the return e-mail address of the sender, as well as the recipient name that is used in the return receipt e-mail function described further hereinafter, as well as an indication of whether the e-mail message is encrypted as described further hereinafter. It should be noted 35 that the header is not encrypted.

As also illustrated in FIG. 3, the envelope data file 40D contains envelope data 44, which includes the list of attachments sent by the sender, and recipients and sender's letter. Senders Attachments 50-1, 50-2...50-n represent attachments that are included within the enhanced e-mail message, as will be described in more detail hereinafter, as will be the contents of the component objects file 54, also referred to as the Active View file, the contents of which are set forth in FIG. 6.

As shown in FIG. 6, component objects file 54 includes a component object header data structure 56, followed by component object or Vixel data structure 58-1, 58-2....58-n, and component object property or Vixel property data structures 60-1, 60-2, 60-2-n...60-n. The contents of the component object header data structure 56 are set forth in FIG. 7, the contents of the component object property data structures 58 are set forth in FIG. 8, and the contents of sub-component object property data structures 60 are set forth in FIG. 9.

Of note with respect to the contents of the header data structure illustrated in FIG. 7 is that the "platinum envelope" entry for the file information is used as a description information, no conditional processing is done with this field. The identifiers for "Container Type" correspond to different representations of default containers.

A default "envelope" container contains component objects representing the front face of an envelope, and different other component objects being recipient address, sender address, stamp, digital time stamp, the back side of the envelope and the envelope open attribute that allows for attachments or messages within the envelope to be viewed appearing on the back side of the envelope so that the e-mail message appears on the recipient's computer screen like an envelope.

A default "postcard" container contains component objects representing the front face of a postcard, and different other component objects represented on the back face of the postcard being the recipient address, sender address, stamp, and digital time stamp.

A default "newsletter" container contains a component object representing each page of a newsletter, as well as various component objects on each page.

A default "CD" container contains a component object for each different audio track for a component object that has a functional attribute of playing music.

A default "Rolled up Newspaper" container contains a component object representing a newspaper, a component object representing the index to the newspaper, and a component object representing each section of the newspaper, as well as component objects for each article if desired.

A default "stack of card" container contain a component object representing each card.

A default "coupon" contains a component object for each coupon that could appear in, for example, a newspaper.

The Front Color indicates the background color that will be used for the container 100, whereas the Envelope Size is used by the default envelope container to represent the width and height dimensions.

5 The Data Location refers to whether data for the component object requires looking to a data field, fetching data using a URL, or an absolute offset. The data field may be a digital data field that contains digital data, such as digital images from, for instance, a GIF, a video sequence, an audio sequence, or other representations of images.

For each component object, there exists the data structure illustrated in FIG. 8, which data structure contains a Component ID that allows that component object to be uniquely identified, 10 as well as Component Attributes that identify whether the component object appears as an image on the front and back of a container, or is invisible. If it appears on the front or back of a container, the size of the component object, its location, and the location of data are also specified. If it is an invisible attribute, the size and location data may not be necessary. Also 15 a hidden component object can, for instance, trigger a return receipt without the knowledge of the recipient, such that a mouse over would cause a return receipt if the hidden component object were configured to respond to a mouse over by providing a return receipt when a mouse-over occurs.

Potentially associated with each component object identified by a data field of FIG. 8 are 20 a plurality of sub-component objects. Each sub-component object associated with a component object contains data fields provided in FIG. 9.

Each sub-component object is initiated by a User Action, which User Action is specified by, but not limited to the following, the position and state of the mouse pointer, which state can be that it is not over the component object (no action), appears over the component object (mouse over), there is a single mouse click when it is over the component object, or there is a 25 mouse double click when it is over the component object. Each User Action can cause a Sub-Component-Type to be displayed/initiated. A plurality of sub-components can be associated with a single component object, and be initiated by the same or different User Action.

Each sub-component object also has an ID, as well as an ID type that has associated with it a primary or a secondary sub-component object. The secondary sub-component object will 30 only be initiated if the primary sub-component object is unavailable, as will be described in more detail hereinafter.

Having now described the preferred data format that is used to transmit the enhanced e-mail message according to the present invention, FIGS. 10 and 11 will be referred to in describing the creation and sending, and the receipt, respectively, of an enhanced e-mail message, so that 35 a container such as the container 100 illustrated in FIG. 12 is displayed on the display 38 of a recipient computer 30 after having been sent from a sender computer 20.

The creation and sending of an enhanced e-mail message according to the present invention, as well as initial receipt of an enhanced e-mail message prior to a user event, will now be described with respect to Figures 10 and 11.

FIGS. 10-10B illustrate the process of creating and transmitting an enhanced e-mail message with a container attachment that is self opening and has the other characteristics described herein. In step 62, header information is first designated to define the container. Thereafter, component definitions are created by the sender in a step 64. There can be any number of component definitions desired, with it being understood that the more definitions that exist, the larger the size of the attachment that will ultimately be transmitted. Thereafter, sub-component definitions can be created for each component object, as described previously, in step 66. In step 68, the component and sub-component files are combined into an ActiveView file, which thereafter is combined with header information and attachments to create a container file in step 70. The container file is encrypted in step 72. Once being encrypted, in the preferred embodiment, the Java class files, collectively termed the recipient executable software, and the native stub are attached to the encrypted container file in step 78. Mime encoding follows in step 80, which mime encoded file is then attached to an e-mail message in step 80 and transmitted.

Upon receipt at the recipient computer in step 84 with reference to FIG. 11, double clicking the received message in step 86 if on a java virtual machine will cause self opening to occur in step 88, or, alternatively, opening the container attachment. Thereafter, the files are extracted from the attachment in step 90 and invocation of the application (the java virtual machine and the java class files) and extraction of the senders container data files in step 94 will cause the display of the container in step 96. Thereafter, in step 98, the computer 30 awaits the recipients action, as will be further described hereinafter.

As a result, of the display on the display 38 of the recipient computer 30, a container, such as the envelope container 100 illustrated in FIG. 12 is obtained. At this time, the recipient executable software then proceeds to a state in which it waits for the user to take an action, as will now be described with respect to FIG. 13.

In step 110, a first event takes place. Step 112 follows and a determination is made in step 112 as to whether the event that takes place is an event that is directed to one or more object components. If it is not such an event, then step 114 follows and the recipient executable software does nothing, and waits for a next event in step 120. Types of nothing events would be, for instance, if the mouse cursor 122 illustrated in FIG 12. moves to an area that is not over any object component.

If, however, step 112 determines that the event is directed to a component object/Vixel, then step 116 follows and it is determined which component objects have events, and then in step 118 the action associated with the event intended for each component object takes place.

For instance, if component object 102 illustrated in FIG. 12 contains an User Action of FIG. 5 9 in the form of a mouse over, then the action of placing the mouse cursor 122 over the component object 102 will cause in step 112 a determination is made that the action involves a component object, and in step 116 a determination that the action pertains to component object 102. Thereafter, step 116 to results and the actions associated with that event will be executed. A specific example of such events will be provided hereinafter.

10 FIG. 14 illustrates one functional attribute of the present invention, which functional attribute can be set forth at the initiation of receiving an enhanced e-mail message according to the present invention, or after the initiation of an action stemming from a component object. An event 124 initiates the conditional display of contents functional attribute. If this conditional display of contents functional attribute occurs at the initiation of the enhanced e-mail message, 15 step 126 follows and the enhanced e-mail message is opened as an attachment, as has been previously described. Step 128 follows, in which terms and conditions which must be agreed upon are first made known to the recipient. Thereafter, step 130 follows and the recipients response is reported back to the sender, in a manner using some form of return receipt as will be described hereinafter. If the conditions responded to in a manner deemed appropriate by the 20 sender, then step 132 follows, and the appropriate contents are then made accessible to the recipient. Step 134, which follows thereafter, waits for another event to occur, as has been previously described with reference to FIG. 13.

FIG. 15 illustrates another functional attribute of the present invention, referred to as a return receipt. If a return receipt is requested by the sender, step 136 is initiated at an 25 appropriate time. This could be when the attachment that forms the enhanced e-mail according to the present invention is initially transmitted to the recipient, when the recipient closes the enhanced e-mail that has been received, or it can be triggered by an event that relates to a sub-component of a component object according to the present invention. If the sender did not request a return receipt when initially sending the message, then step 140 follows, no action is 30 taken, and then step 142 waits for another event to occur, as has been previously described with reference to FIG. 13. If, however, sender requested a return receipt, step 144 follows and a determination is made whether a specific format of response was requested. If not, step 146 follows and a default response, such as "xyz@abc.com has opened the envelope at 10:pm pacific daylight time" is transmitted, this response being delivered using the sender address 35 information, and other time information on the system. Step 148 follows and the computer 30

waits for another event to be initiated by the recipient, as has been previously described with reference to FIG. 13.

If a specific format of response was requested in step 144, then step 150 follows and determination is made whether the sender's request requested a specific input from the recipient 5 type of response. If it did not, then the senders configured response is sent in step 152 to addresses specified by the sender, which may be the senders own e-mail address, the address of another, or the address of many others. Thereafter a step 154, like step 148 previously described, follows.

If a response from recipient was requested, then the requested response is made known in 10 step 156 and collected and compiled in step 158. Thereafter, the recipient's response is automatically transmitted in step 160 and another wait step 162 follows.

The return receipt responses transmitted back to the sender in steps 146, 152, and 160 are each automatically sent using the API provided by respective e-mail clients. For SMTP, routines to send mail can be written using public domain information.

15 FIGs. 16A, 16B1-16B2 and 16C1-16C4 illustrate example data structures for an envelope container having a company logo as an object component according to the invention. FIGs. 17A-17D illustrate views and actions that result from the data structures such as set forth in FIGS. 16A, 16B1-16B2 and 16C1-16C4. So that the capabilities of the present invention can be appreciated, it should be noted that FIG. 17A is represented by the data structure of FIGS. 20 16a, 16C1 and 16C2; FIG. 17B is represented by the data structure in FIG. 16A; FIG. 17C is represented by the data structure in FIG. 16C3; and FIG. 17D is represented by the data structure in FIG. 16C4.

25 Of particular note, a mouse over 180 in FIG. 17A results in a bubble 180-A, which corresponds to data associated with the bubble as defined by mouse over action if FIG. 16C1 that has a text sub-component. Similarly, FIG. 16C2 data defines that the mouse over 182 will cause a process launch attribute that will result in audio music being played by a program containing program instructions to launch the audio content, which programs can also have been transmitted from the sender with the originally sent enhanced e-mail message.

30 A digital time stamp 184 is also included and indicates either sender transmission time or, in the alternative, a certified time stamp from a dedicated time stamp server. Object components 188-204 are also illustrated on both sides of the envelope, and represent the ability of the present invention to depict, as desired by the user, many different forms, in many different manners, as well as attributes that then lead to the recipient to other areas. For instance, Figure 16C3, when a mouse click over the stamp object component 186 occurs, if the 35 user is on-line at the time, will result in the user automatically being connected to the home page 206 illustrated in FIG. 17A. If, however, that mouse click over the stamp object

component 186 occurs, but the user is off-line, then the FIG. 16C3 primary sub-component is not used, but the alternate sub-component identified by FIG. 15C4 is launched, which in this case results in a textual message being displayed.

5 The above example is intended to show how robust the enhanced e-mail message enhancement apparatus according to the present invention actually is. By being able to be sent as an attachment through e-mail, the appearance of the e-mail message can be enhanced at the option of the sender, and the recipient will be ensured of being able to receive it in the intended form, since the executable recipient program instructions are preferably transmitted as part of the attachment.

10 Furthermore, even though the executable recipient program instructions can ensure receipt of the message in its intended form, the architecture of the present invention also provides that if a more robust program or hardware element exists on the recipient computer 30, which can even further enhance the content that is transmitted by the sender, then that more robust program or hardware element exists on the recipient computer 30 can be used instead of the 15 executable recipient program instructions that were transmitted by the sender.

While the invention has been particularly shown and described with reference to the preferred embodiments, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the present invention.

We claim:

1. A method of processing an e-mail message that includes a representation of an envelope containing a time stamp on a computer screen of a computer, said method comprising the steps of:
  - 5 receiving, at said computer, said e-mail message that includes said representation of said envelope containing said time stamp;
  - rendering on said computer screen, using said computer, a representation of a front of said envelope;
  - rendering on said computer screen, using said computer, a representation of said time stamp 10 at a screen location that is within the front of the envelope;
  - causing, upon initiation of a user action when a cursor is positioned on said computer screen at a screen location corresponding to that of said time stamp, said computer to connect with a location associated with said time stamp.
- 15 2. A method according to claim 1 wherein said step of causing said computer to connect with said location associated with said time stamp uses a uniform resource locator to determine said location.
- 20 3. A method according to claim 1 wherein said step of rendering said envelope renders said envelope front so that it is rectangular in shape and said time stamp is located on the upper right hand corner of said rectangular envelope.
- 25 4. A method according to claim 3 wherein said e-mail message further includes a stamp, said stamp being displayed on said screen at the upper right hand corner of said rectangular envelope such that said time stamp overlaps said stamp, and said method further comprises the step of:
  - causing, upon initiation of another user action when said cursor is positioned on said computer screen in another screen location corresponding to that of said stamp, said computer to connect with another location associated with said stamp.
- 30 5. A method according to claim 4 wherein said step of causing said computer to connect with said another location associated with said stamp uses another uniform resource locator to determine said location.
- 35 6. A method according to claim 1 wherein said step of causing is performed by execution of executable software that is received by said computer with said e-mail message.

7. A method according to claim 1 wherein said e-mail message further includes textual content, said textual content being represented by an object on said envelope, and further comprising the step of causing, upon initiation of another user action when said cursor is positioned on said computer screen in another screen location corresponding to that of said object, said computer to display said textual content.  
5
8. A method according to claim 7 wherein, upon initiation of said another user action causing said computer to display said textual content, said another user action also causes the steps of:  
10 generating an electronic response indicating said textual content has been displayed by said computer; and  
transmitting said generated electronic response.
9. A method according to claim 1, wherein each of said envelope front and said time stamp have an associated component identifier which said computer uses when rendering said envelope front and said time stamp.  
15
10. A method according to claim 9, wherein each of said envelope front and said time stamp have associated component height data and component width data which said computer uses when rendering said envelope front and said time stamp.  
20
11. A method according to claim 10, wherein each of said envelope front and said time stamp have associated vertical screen location data and horizontal screen location data which said computer uses when rendering said envelope front and said time stamp.
- 25 12. A method according to claim 10, wherein said envelope time stamp has an associated sub-component identifier which said computer uses during said step of causing said computer to connect with said another location associated with said stamp.
13. A method according to claim 1 wherein said time stamp provides both a date and a time.  
30
14. A method according to claim 13 wherein said time stamp is provided from a time stamp server.

15. A method according to claim 1 wherein said e-mail message further includes another object, said object being displayed on said screen and said method further comprises the step of:  
causing, upon initiation of another user action when said cursor is positioned on said computer screen in another screen location corresponding to that of said object, said computer  
5 to produce audio tones.
16. A method according to claim 1 wherein said e-mail message further includes another object, said object being displayed on said screen and said method further comprises the step of:  
causing, upon initiation of another user action when said cursor is positioned on said computer screen in another screen location corresponding to that of said object, said computer  
10 to play a video.
17. A method of processing an e-mail message that includes a representation of an envelope containing a sender identity identification on a computer screen of a computer, said method comprising the steps of:  
receiving, at said computer, said e-mail message that includes said representation of said envelope containing said sender identity;  
rendering on said computer screen, using said computer, a representation of a front of said envelope;  
20 rendering on said computer screen, using said computer, a representation of said sender identity identification at a screen location that is within the front of the envelope;  
causing, upon initiation of a user action when a cursor is positioned on said computer screen at a screen location corresponding to that of said sender identity identification, said computer to connect with a location associated with said sender identity identification.  
25
18. A method according to claim 17 wherein said step of causing said computer to connect with said location associated with said sender identity uses a uniform resource locator to determine said location.
- 30
19. A method according to claim 17 wherein said e-mail message further includes a time stamp, and said method further comprises the step of:  
causing, upon initiation of another user action when said cursor is positioned on said computer screen in another screen location corresponding to that of said time stamp, said computer  
35 to connect with another location associated with said time stamp.

20. A method according to claim 19 wherein said step of causing said computer to connect with said another location associated with said time stamp uses another uniform resource locator to determine said location.
- 5      21. A method according to claim 17 wherein said step of rendering said envelope renders said envelope front so that it is rectangular in shape, said sender identity identification is located on the upper left hand corner of said rectangular envelope and said time stamp is located on the upper right hand corner of said rectangular envelope.
- 10     22. A method according to claim 19 wherein said e-mail message further includes a stamp, said stamp being displayed on said screen at the upper right hand corner of said rectangular envelope such that said time stamp overlaps said stamp and said method further comprises the step of: causing, upon initiation of a further user action when said cursor is positioned on said computer screen in another screen location corresponding to that of said stamp, said computer to connect with another location associated with said stamp.
- 15     23. A method according to claim 17 wherein said sender identity is represented as one of a logo and an address.
- 20     24. A method according to claim 17 wherein said e-mail message further includes a request for a configured response, said request for said configured response being represented by an object on said envelope, and method further comprising the steps of: causing, upon initiation of another user action when said cursor is positioned on said computer screen in another screen location corresponding to that of said object, said computer to display said request for configured response; compiling of said configured response entered into said computer by said user; and transmitting said compiled configured response from said computer.
- 25     25. A method of presenting, on a screen of a second computer that uses a second e-mail platform, information to a recipient that has been electronically transmitted as an e-mail message from a first computer using a first e-mail platform to said second computer and receiving at said first computer from said second computer a return receipt comprising the steps of: forming a data file representing said information as a plurality of objects, some of said objects having associated therewith digital images and certain of said objects having associated therewith a plurality of initiable sub-components, said initiable sub-components being initiated
- 30
- 35


- by a user action, each of said plurality of objects having an associated component identifier which said computer uses to rendering visual portions of said objects;
- 5 creating executable software that can cause said information to automatically present itself on said screen of said second computer, generate a return receipt indicating that said information has been presented and cause said digital images to be rendered;
- creating an e-mail message file by combining together said executable software and said data file;
- electronically transmitting said e-mail message file from said first computer to said second computer;
- 10 automatically presenting said information on said screen of said second computer;
- generating, at said second computer and using said executable software and said second e-mail platform, said return receipt; and
- receiving, after transmission of said return receipt, said return receipt at said first computer, thereby indicating that said information has been presented to said recipient.
- 15
26. The method according to claim 25 wherein said user action is one of a mouse-over, a mouse click and a mouse double click, which action occurs when a cursor is located over one of said certain objects and which action causes another electronic response.
- 20 27. The method according to claim 25 wherein said user action is one of a mouse-over, a mouse click and a mouse double click, which action occurs when a cursor is located over one of said certain objects and which action causes audio tones to be produced.
- 25 28. The method according to claim 25 wherein said user action is one of a mouse-over, a mouse click and a mouse double click, which action occurs when a cursor is located over one of said certain objects and which action causes a video to be played.
- 30 29. The method according to claim 25 wherein said user action is one of a mouse-over, a mouse click and a mouse double click, which action occurs when a cursor is located over one of said certain objects and which action causes another digital image to be presented.

30. The method according to claim 25 wherein said user action is one of a mouse-over, a mouse click and a mouse double click, which action occurs when a cursor is located over one of said certain objects and which action causes said computer to connect with a location associated with said one of said certain objects.

5

31. A method according to claim 25, wherein certain of said initiable sub-components will result in different actions, one action occurring if the second computer is on-line and another action occurring if the second computer is off-line.

1/23

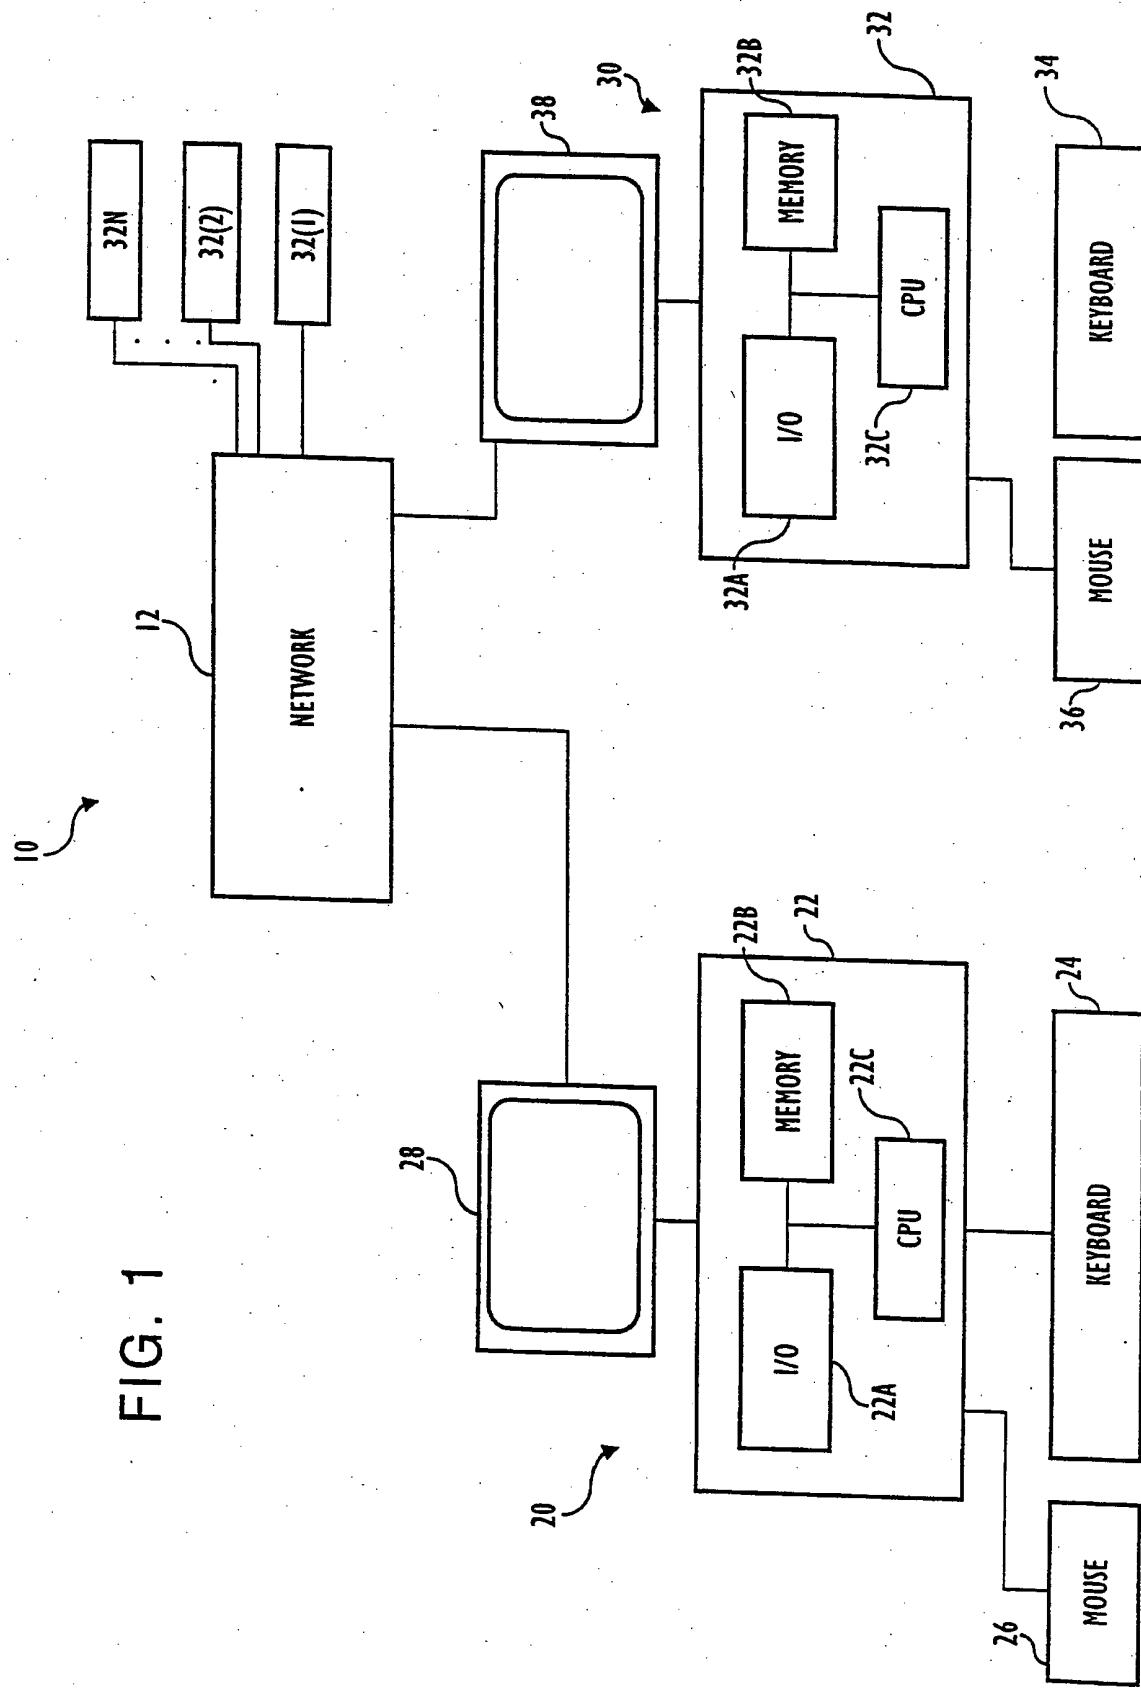

2/23

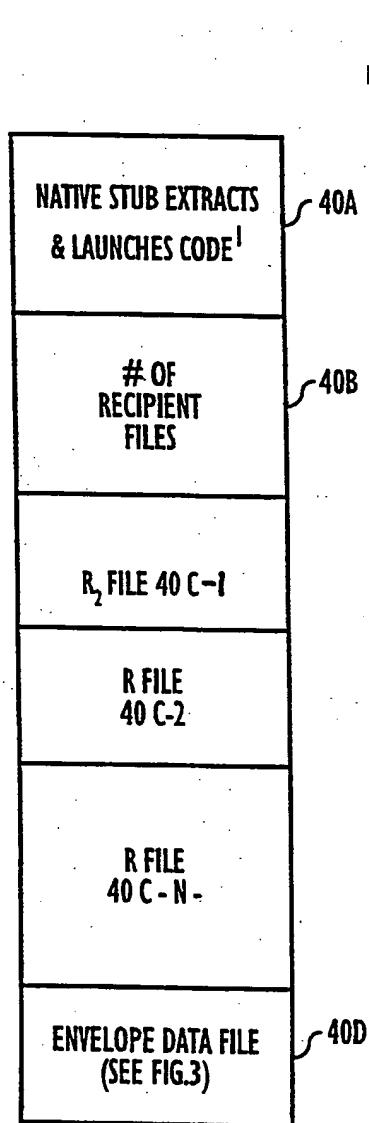


FIG. 2

3/23

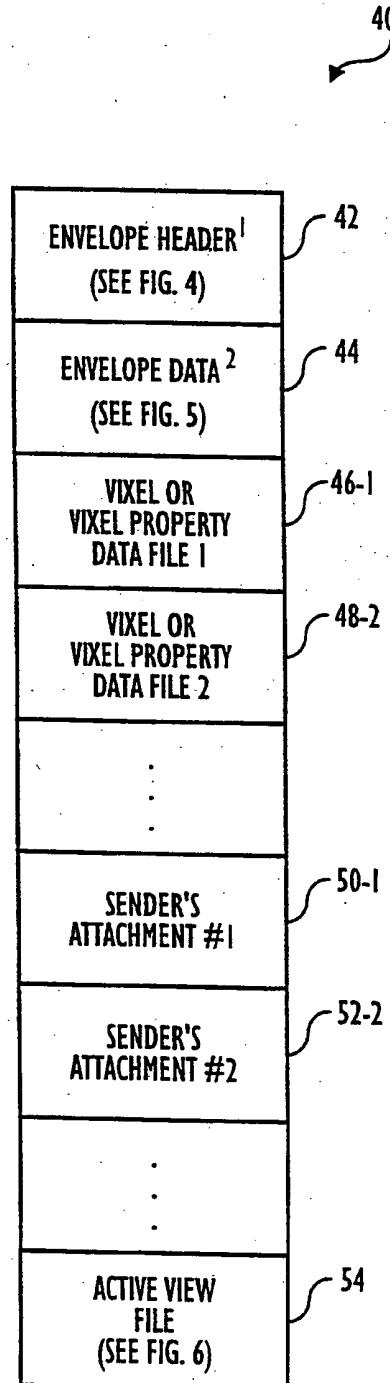


FIG. 3

4/23

PROGRAMMER'S NAME : HARESH GUJARATHI  
DATE : 06/29/1996  
PROJECT NAME : ENVELOPE.MAK  
FILE NAME : ENVPHEAD.H

## HEADER DEFINITION FOR ENVELOPE FILE

\*/

```
#INCLUDE "SSDEFINE.H"
#INCLUDE "WINDOWS.H"

#ifndef _ENVPHEAD_H_
#define _ENVPHEAD_H_
```

TYPEDEF STRUCT TAGENVELOPEHEADER

(

    UNSIGNED SHORT SSIZE;  
    CHAR CHMAJOR VERSION;  
    CHAR CHMINORVERSION;  
    SHORT SDATATYPE;  
    WORD USESECURITYATTRIBUTES; // UINT IN 16 BIT ENVELOPE  
    WORD USESECURITYMETHODSATTRIBUTES; // UINT IN 16 BIT ENVELOPE  
    WORD UENVELOPEATTRIBUTES; // UINT IN 16 BIT ENVELOPE  
    STR31 SZPLAYERNAME; // C STRING

    WORD UCOMMAND; // UINT IN 16 BIT ENVELOPE  
    STR255 SZVALUE; // COULD BE THE URL, C-STRING

    STR31 SZSENDERNAME; // C STRING  
    STR31 SZPACKAGENAME; // C STRING

    // NEW FOR HALLMARK  
    UNSIGNED LONG SRESERVEDDATALENGTH;  
    UNSIGNED LONG SRESERVEDDATAOFFSET; //RESERVED DATA COMES AFTER SLIP DATA BUT BEFORE COMPONENT DATA

FIG. 4(a)

5/23

```
UNSIGNED SHORT STEMPLATETYPE; // 1: VANILLA
                                // 2: CUSTOM
UNSIGNED LONG SCOMPONENTDATALENGTH;
UNSIGNED LONG SCOMPONENTDATAOFFSET; // COMPONENT DATA COMES AFTER RESERVED DATA
)
```

```
ENVELOPEHEADER;
```

```
ENUM (
    SECURITYATTR_NOTSECURED = 0x0000,
    SECURITYATTR_SECURED   = 0x0001,
    SECURITYATTR_WASSECURED = 0x0002,
);
```

```
ENUM (
    ENEVELOPATTR_CLEAN = 0x0000,
    ENEVELOPATTR_SENT  = 0x0001
);
```

```
ENUM (
    SECURITYMETHOD_RC4      = 0x0001,
    SECURITYMETHOD_RC4_MAC  = 0x0002,
);
```

```
ENUM (
    COMMAND_LAUNCH        = 0x0001,
    COMMAND_JAVA           = 0x002,
    COMMAND_FETCHURL       = 0x0004
);
```

```
#ENDIF // _ENVPHEAD_H_
```

```
#DEFINE APP_MINOR_VERSION 0
#DEFINE APP_MINOR_VERSION 1
```

FIG. 4(b)

6/23

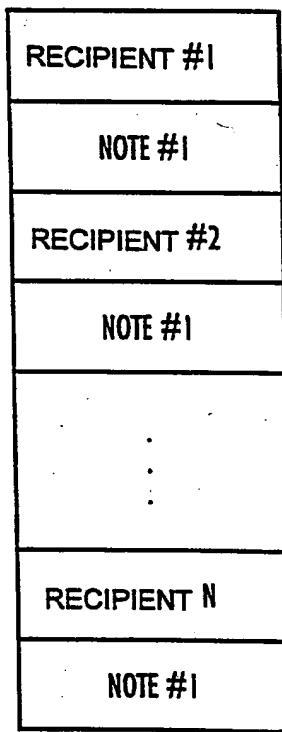


FIG. 5

7/23

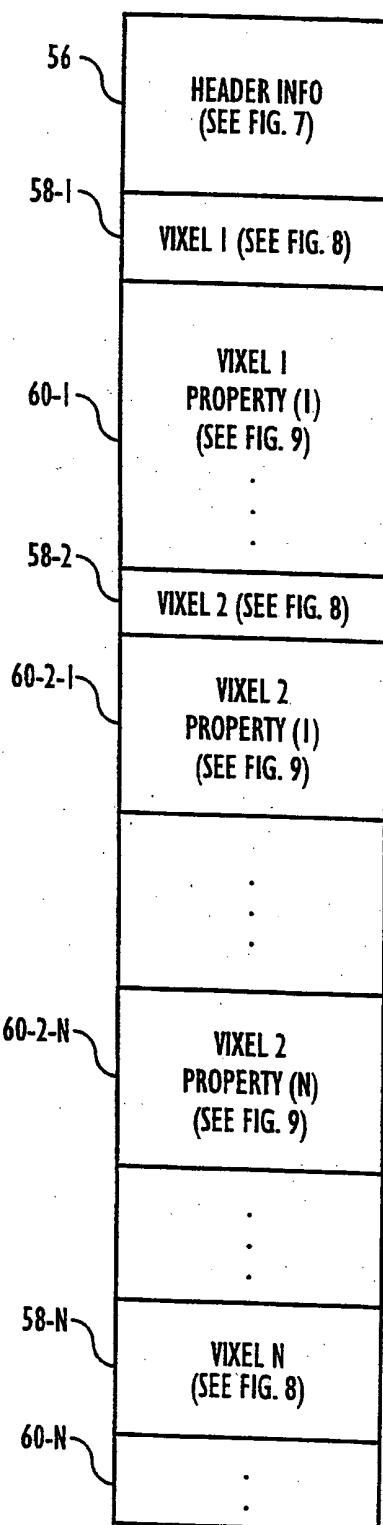


FIG. 6

8/23

FIELD	LENGTH	VALUES
CHECKSUM	4 BYTES	
HEADER LENGTH	4 BYTES	
VERSION	4 BYTES	
FILE INFORMATION SIZE	4 BYTES	
FILE INFORMATION	VARIABLE	EX. "PLATINUM ENVELOPE"
CREATOR INFORMATION SIZE	4 BYTES	
CREATOR INFORMATION	VARIABLE	EX. "AMERICA ONLINE"
CONTAINER TYPE	4 BYTES	1 ENVELOPE 2 POSTCARD 3 NEWSLETTER 4 CD 5 ROLLED UP NEWSPAPER 6 STACK OF CARDS 7 COUPON
FRONT COLOR (RED)	2 BYTES	
FRONT COLOR (GREEN)	2 BYTES	
FRONT COLOR (BLUE)	2 BYTES	
BACK COLOR (RED)	2 BYTES	
BACK COLOR (GREEN)	2 BYTES	
BACK COLOR (BLUE)	2 BYTES	
ENVELOPE SIZE (W)	2 BYTES	SIZE IN PIXELS
ENVELOPE SIZE (H)	2 BYTES	
RESERVED DATA LENGTH	4 BYTES	
RESERVED DATA	VARIABLE	
DATA LOCATION	BYTE	1 DATA FIELD 2 FETCH DATA USING URL 3 OFFSET TO COMPONENT LOCATION (ABSOLUTE OFFSET)
DATA LENGTH	4 BYTES	LENGTH OF ALL SUB-COMPONENTS.
DATA	VARIABLE	

FIG. 7

9/23

FIELD	LENGTH	VALUES
COMPONENT ID	BYTE	
COMPONENT LENGTH	4 BYTES	
COMPONENT ATTRIBUTES	BYTE	1 INVISIBLE 2 FRONT 3 BACK
COMPONENT LOCATION (H)	2 BYTES	LOCATION ON SCREEN
COMPONENT LOCATION (V)	2 BYTES	
COMPONENT SIZE (W)	2 BYTES	SIZE IN PIXELS
COMPONENT SIZE (H)	2 BYTES	
DATA LOCATION	BYTE	1 DATA FIELD 2 FETCH DATA USING URL 3 OFFSET TO OTHER COMPONENT'S DATA LENGTH FILED (ABSOLUTE OFFSET) 4 GET DATA USING FTP
DATA LENGTH	4 BYTES	LENGTH OF ALL SUB-COMPONENTS
DATA	VARIABLE	

FIG. 8

10/23

FIELD	LENGTH	VALUES
SUB-COMPONENT ID	BYTE	
SUB-COMPONENT LENGTH	4 BYTES	
SUB-COMPONENT TYPE	BYTE	1 GIF 2 PROCESS 3 AUDIO 4 TEXT 5 VIDEO 6 POSTX : :
ATTRIBUTES	BYTE	0 NOTHING  1 PROCESS: LAUNCH APPLICATION 2 PROCESS: GOTO URL 3 PROCESS: SEND EMAIL 4 CONDITIONAL DISPLAY 5 CUSTOM RECEIPT 6 PROCESS FTP  1 GIF: FRONT BRUSH 2 GIF: BACK BRUSH  1 OPEN 2 COPY 3 PRINT : :
ID TYPE	BYTE	0 PRIMARY SUB-COMPONENT 1 ALTERNATE SUB-COMPONENT
ALTERNATE SUB-COMPONENT INDEX	BYTE	0 NO ALTERNATE SUB-COMPONENT  OR  INDEX NUMBER (SEQUENTIAL ORDER RELATIVE TO THE SAME COMPONENT.)

FIG. 9(a)

11/23

FIELD	LENGTH	VALUES
USER'S ACTION	BYTE	0 NOTHING 1 MOUSE OVER 2 MOUSE CLICK 3 MOUSE DOUBLE CLICK : :
DATA NAME LENGTH	4 BYTES	
DATA NAME	VARIABLE	ATTACHMENT NAME OR DATA NAME
DATA LOCATION	BYTE	1 ATTACHMENT LIST 2 DATA FIELD OFFSET TO OTHER SUB-COMPONENT'S DATA LENGTH FIELD. (ABSOLUTE OFFSET) 3 FETCH DATA USING URL 4 GET DATA USING FTP : :
DATA LENGTH	4 BYTES	
DATA	VARIABLE	DATA

FIG. 9(b)

12/23

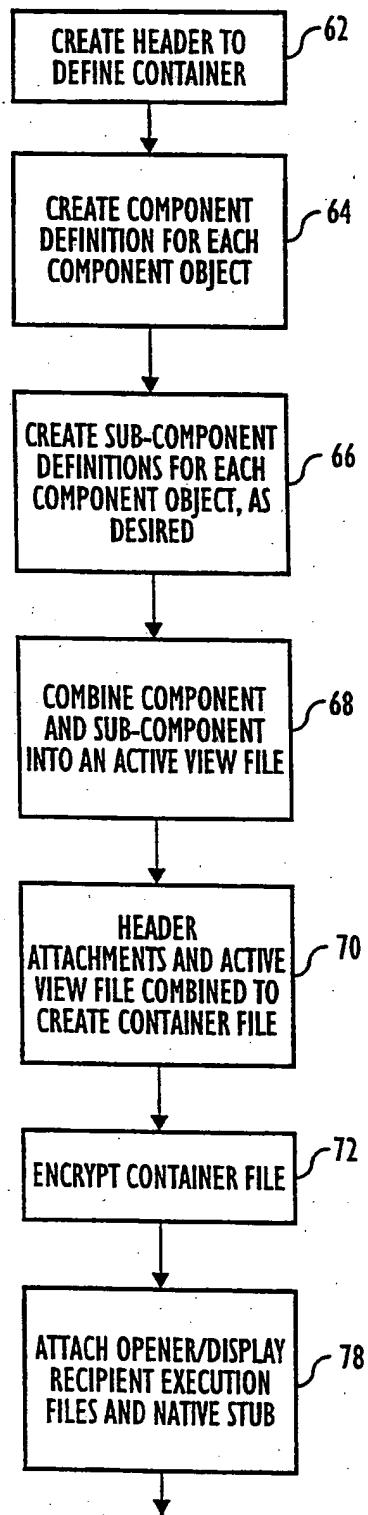


FIG. 10(a)

13/23

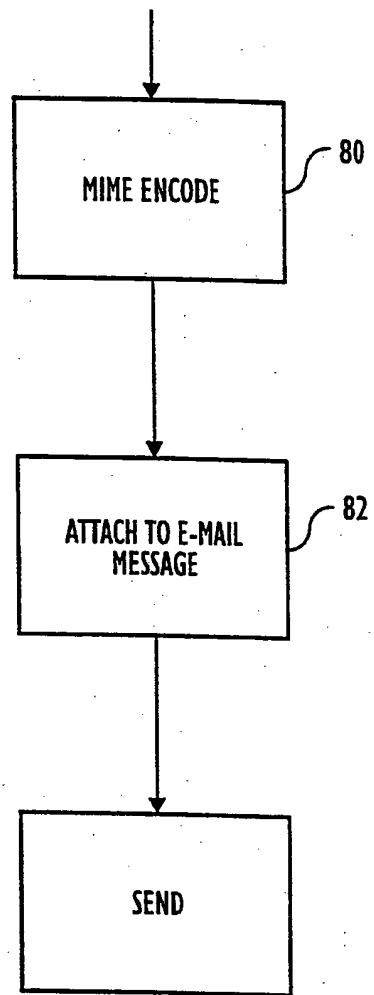


FIG. 10(b)

14/23

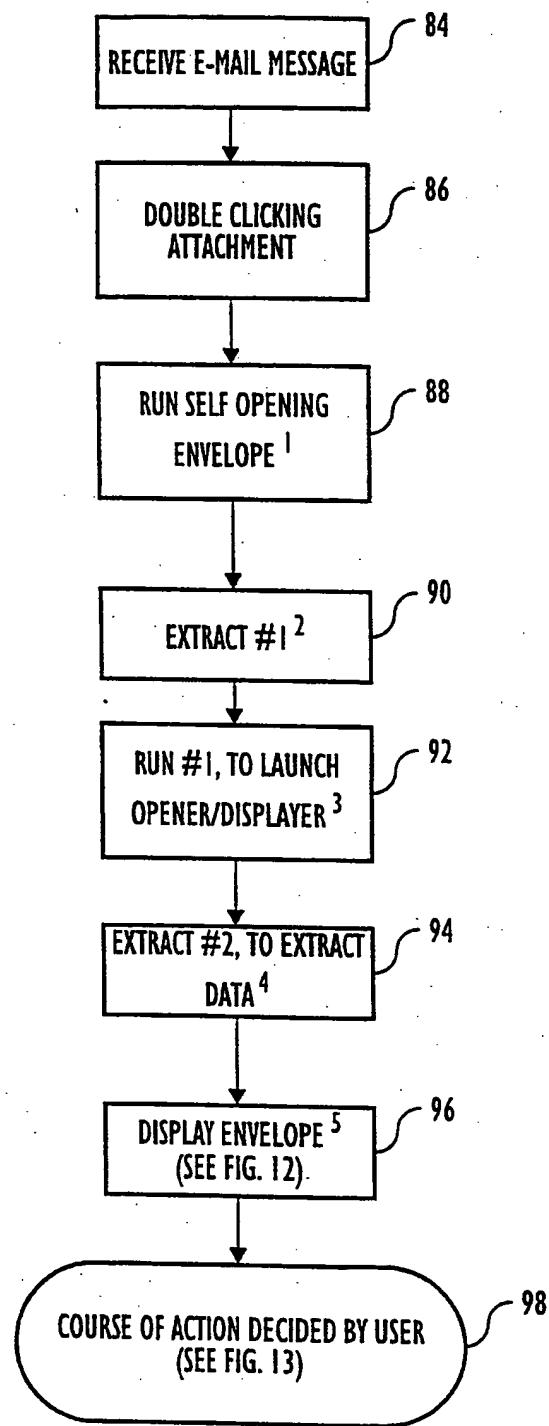


FIG. 11

15/23

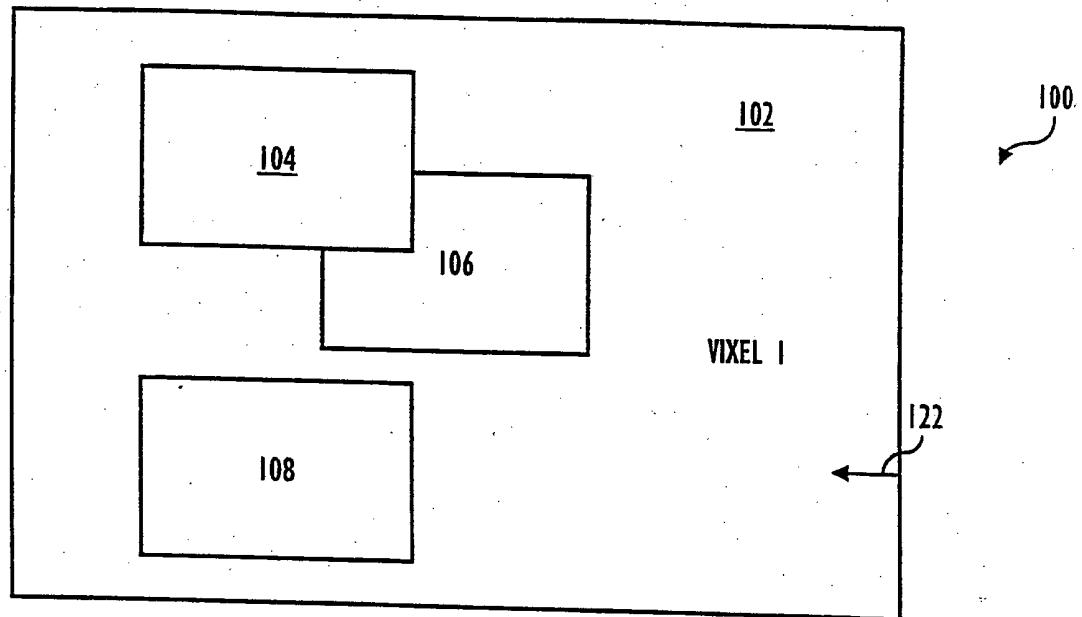


FIG. 12

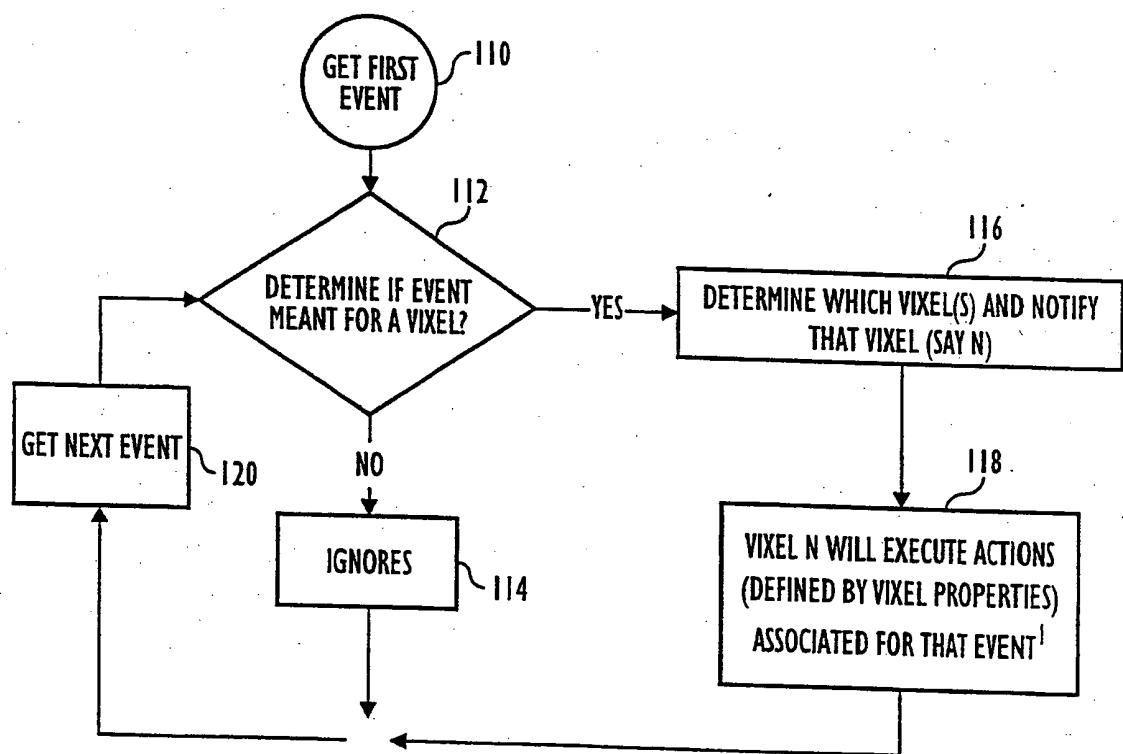


FIG. 13

16/23

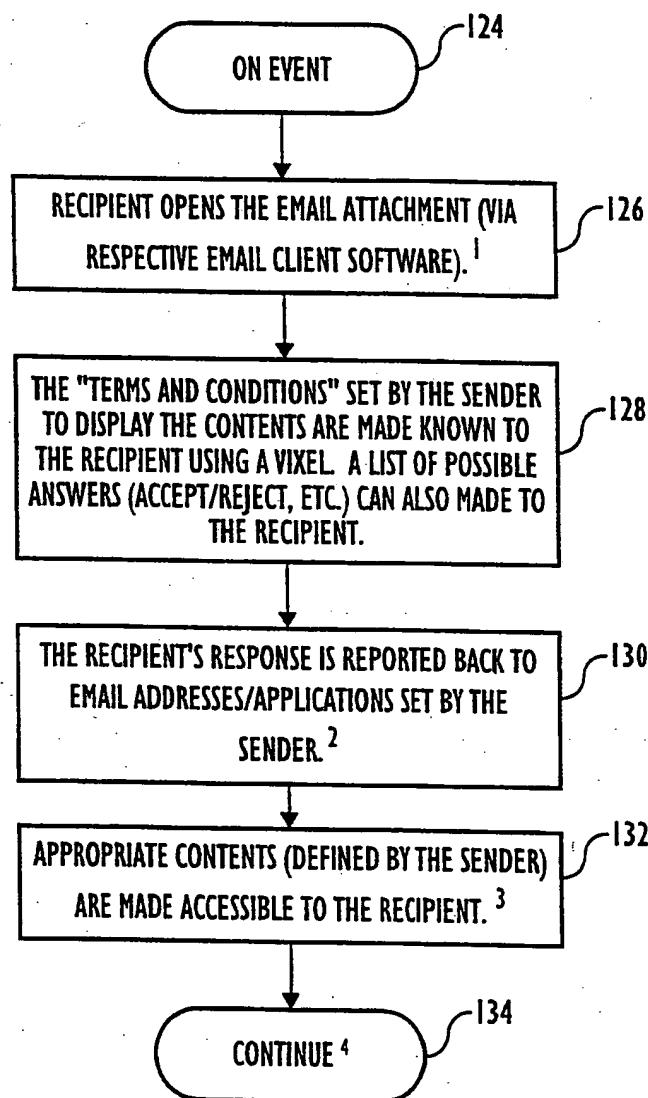


FIG. 14

17/23

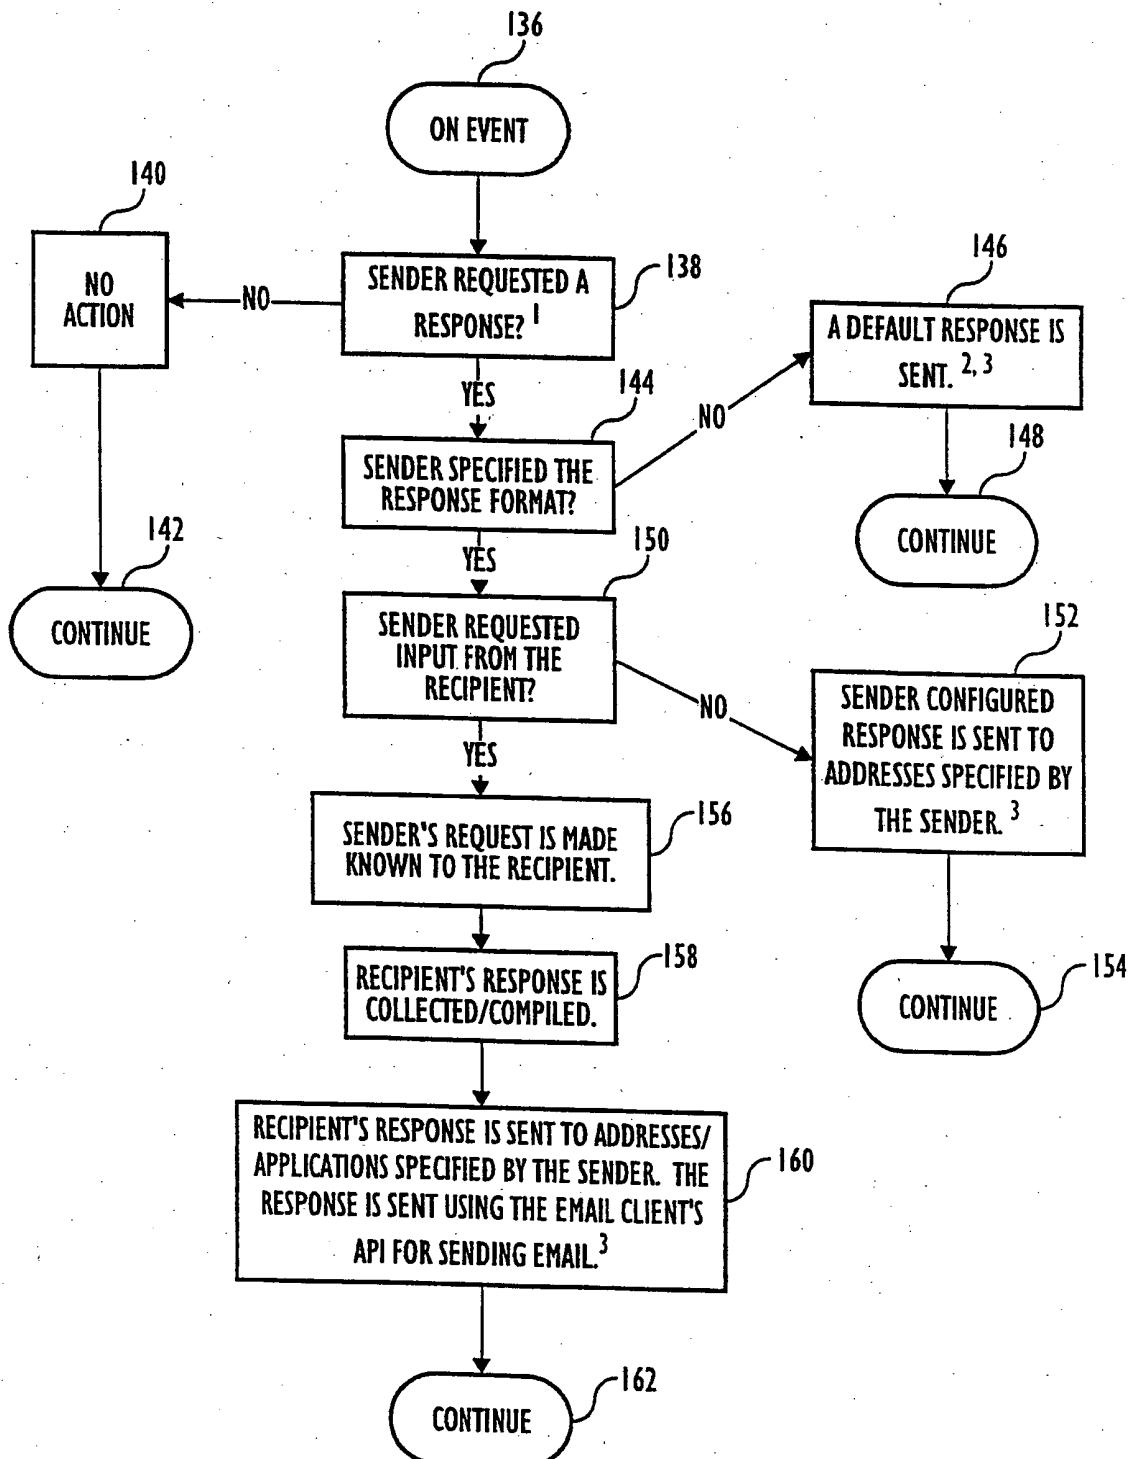


FIG. 15

18/23

FIELD	LENGTH	VALUES	DESCRIPTION
CHECKSUM	4 BYTES		
HEADER LENGTH	4 BYTES		
VERSION	4 BYTES		
FILE INFORMATION SIZE	4 BYTES		
FILE INFORMATION	VARIABLE	"PLATINUM ENVELOPE"	
CREATOR INFORMATION SIZE	4 BYTES		
CREATOR INFORMATION	VARIABLE	"POSTX"	
CONTAINER TYPE	BYTE	1	ENVELOPE
FRONT COLOR (RED)	2 BYTES	0	BLACK
FRONT COLOR (GREEN)	2 BYTES	0	
FRONT COLOR (BLUE)	2 BYTES	0	
BACK COLOR (RED)	2 BYTES	255	YELLOW
BACK COLOR (GREEN)	2 BYTES	255	
BACK COLOR (BLUE)	2 BYTES	0	
ENVELOPE SIZE (W)	2 BYTES	800	WIDTH IN PIXELS
ENVELOPE SIZE (H)	2 BYTES	600	HEIGHT IN PIXELS
RESERVED DATA LENGTH	4 BYTES		
RESERVED DATA	VARIABLE		
DATA LOCATION	BYTE	1	DATA FIELD
DATA LENGTH	4 BYTES		LENGTH OF ALL SUB-COMPONENTS.
DATA	VARIABLE		

FIG. 16(a)

FIELD	LENGTH	VALUES	DESCRIPTION
COMPONENT ID	BYTE	15	COMPONENT ID
COMPONENT LENGTH	4 BYTES		
COMPONENT ATTRIBUTES	BYTE	2	(FRONT)
COMPONENT LOCATION (H)	2 BYTES	100	(LOCATION ON SCREEN)
COMPONENT LOCATION (V)	2 BYTES	500	
COMPONENT SIZE (W)	2 BYTES	50	(SIZE IN PIXELS)
COMPONENT SIZE (H)	2 BYTES	50	
DATA LOCATION	BYTE	1	DATA FIELD
DATA LENGTH	4 BYTES		LENGTH OF ALL SUB-COMPONENTS
DATA	VARIABLE		THE GIF FILE.

FIG. 16(b-1)

19/23

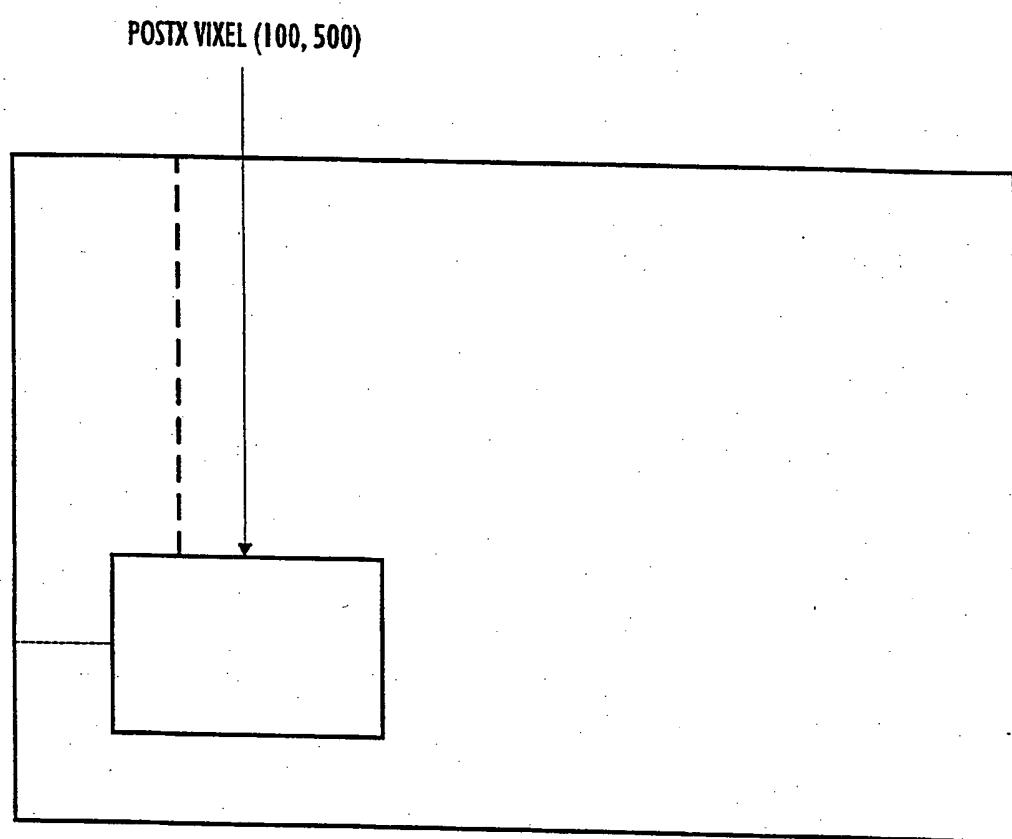


FIG. 16(b-2)

20/23

FIELD	LENGTH	VALUES	DESCRIPTION
SUB-COMPONENT ID	BYTE	160	SUB-COMPONENT ID
SUB-COMPONENT LENGTH	4 BYTES		
SUB-COMPONENT TYPE	BYTE	4	TEXT
ATTRIBUTES	BYTE	0	NOTHING
ID TYPE	BYTE	0	PRIMARY SUB-COMPONENT
ALTERNATE SUB-COMPONENT INDEX	BYTE	0	NO ALTERNATE SUB-COMPONENT
ACTION	BYTE	1	MOUSE OVER
DATA NAME LENGTH	4 BYTES		
DATA NAME	VARIABLE	"BUBBLE.TXT"	ATTACHMENT NAME
DATA LOCATION	BYTE	1	ATTACHMENT LIST
DATA LENGTH	4 BYTES	0	
DATA	VARIABLE	NO DATA	

FIG. 16(c-1)

FIELD	LENGTH	VALUES	DESCRIPTION
SUB-COMPONENT ID	BYTE	160	SUB-COMPONENT ID
SUB-COMPONENT LENGTH	4 BYTES		
SUB-COMPONENT TYPE	BYTE	3	AUDIO
ATTRIBUTES	BYTE	1	PROCESS: LAUNCH APPLICATION.
ID TYPE	BYTE	0	PRIMARY SUB-COMPONENT
ALTERNATE SUB-COMPONENT INDEX	BYTE	0	NO ALTERNATE SUB-COMPONENT
ACTION	BYTE	1	MOUSE OVER
DATA NAME LENGTH	4 BYTES		
DATA NAME	VARIABLE	"SIGNATURE.RMF"	ATTACHMENT NAME
DATA LOCATION	BYTE	1	ATTACHMENT LIST
DATA LENGTH	4 BYTES	0	
DATA	VARIABLE	NO DATA	

FIG. 16(c-2)

21/23

FIELD	LENGTH	VALUES	DESCRIPTION
SUB-COMPONENT ID	BYTE	160	SUB-COMPONENT ID
SUB-COMPONENT LENGTH	4 BYTES		
SUB-COMPONENT TYPE	BYTE	2	PROCESS
ATTRIBUTES	BYTE	2	PROCESS: GO TO URL
ID TYPE	BYTE	0	PRIMARY SUB-COMPONENT
ALTERNATE SUB-COMPONENT INDEX	BYTE	3	(INDEX OF ALTERNATE SUB-COMPONENT)
ACTION	BYTE	2	MOUSE CLICK
DATA NAME LENGTH	4 BYTES		
DATA NAME	VARIABLE	"POSTXURL.TXT"	ATTACHMENT NAME
DATA LOCATION	BYTE	1	ATTACHMENT LIST
DATA LENGTH	4 BYTES	0	
DATA	VARIABLE	NO DATA	

FIG. 16(c-3)

FIELD	LENGTH	VALUES	DESCRIPTION
SUB-COMPONENT ID	BYTE	77	SUB-COMPONENT ID
SUB-COMPONENT LENGTH	4 BYTES		
SUB-COMPONENT TYPE	BYTE	2	PROCESS
ATTRIBUTES	BYTE	0	PROCESS: LAUNCH APPLICATION (TO DISPLAY TEXT)
ID TYPE	BYTE	1	ALTERNATE SUB-COMPONENT
ALTERNATE SUB-COMPONENT INDEX	BYTE	0	NO ALTERNATE SUB-COMPONENT
ACTION	BYTE	2	MOUSE CLICK
DATA NAME LENGTH	4 BYTES		
DATA NAME	VARIABLE	"ALTERNATE.TXT"	ATTACHMENT NAME
DATA LOCATION	BYTE	1	ATTACHMENT LIST
DATA LENGTH	4 BYTES	0	
DATA	VARIABLE	NO DATA	

FIG. 16(c-4)

22/23

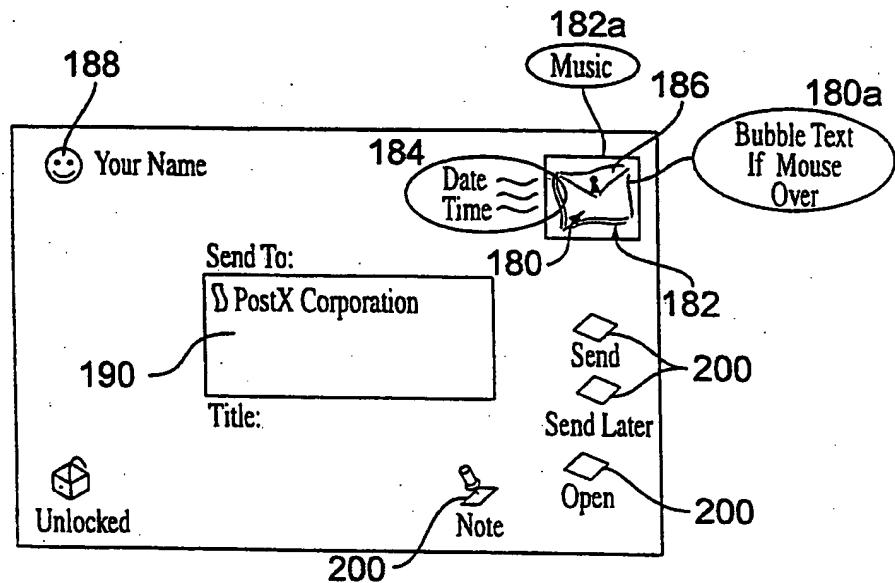


FIG. 17(a)

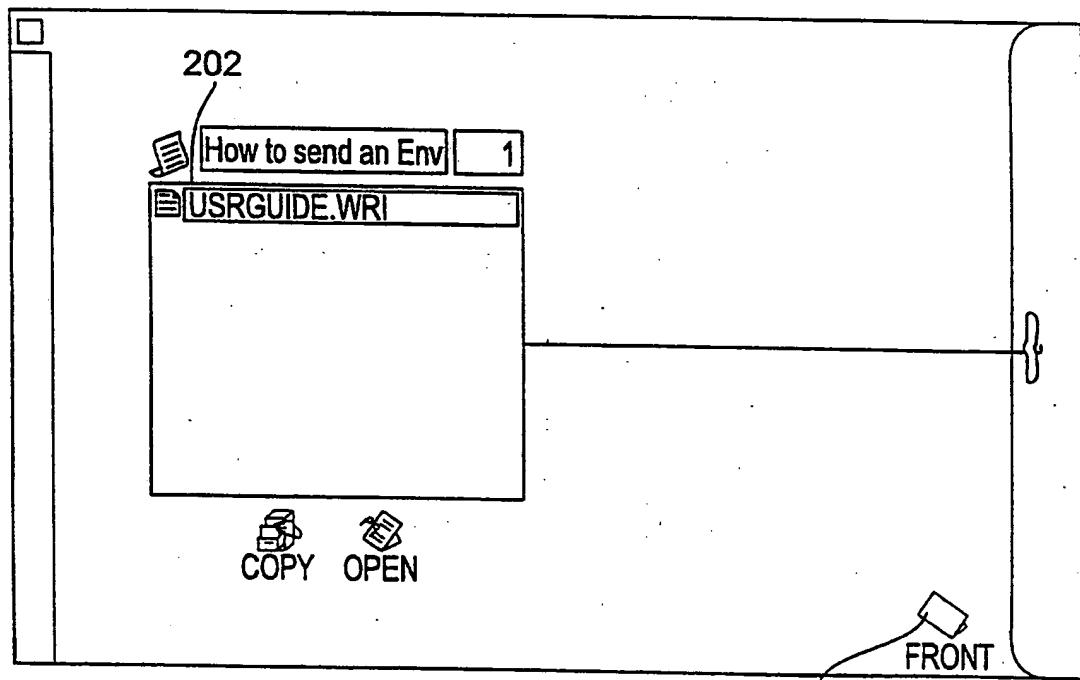


FIG. 17(b)

23/23

206



Ever had trouble sending graphics to a different mail system?  
 Ever sent mail and wondered if it had been received?  
 Ever wondered how confidential your e-mail really is?  
 If you've ever asked these questions...

DO WE EVER HAVE SOMETHING FOR YOU

## Introducing PostX Envelope

Easily sends & receives  
rich text documents  
and images

Protects your privacy  
with a password  
activated lock

<input checked="" type="checkbox"/> Your Name	<input type="button" value="Send"/>
Send To:	<input type="button" value="Send"/>
<input checked="" type="checkbox"/> PostX Corporation	<input type="button" value="Send Later"/>
Title:	<input type="button" value="Open"/>
<input checked="" type="checkbox"/> Unlocked	<input type="button" value="Note"/>

Sends you a receipt  
when an Envelope  
you have sent is opened

Send now, send later  
attach stickies, all from  
the simple interface

So what can PostX Envelope do for me?

SOFTWARE DOWNLOAD	CUSTOMER SUPPORT	WHAT'S NEW	DOWNLOAD OPENER	ABOUT POSTX	CONTACT POSTX
-------------------	------------------	------------	-----------------	-------------	---------------

software + support + what's new + download opener + about PostX + contact PostX  
text only homepage

best viewed with



site by  
blissworks

Copyright © 1994-1997 PostX Corporation, All Rights Reserved.  
 PostX is a registered trademark of PostX Corporation.  
 All other trademarks and service marks belong to their respective holders.

208

PostX is a company located in Cupertino, CA.

FIG. 17(d)

# INTERNATIONAL SEARCH REPORT

In. International Application No  
PCT/US 98/08236

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 G06F17/60

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>" "REAL" MAIL USER INTERFACE FOR IN-BASKET"</p> <p>IBM TECHNICAL DISCLOSURE BULLETIN, vol. 31, no. 10, 1 March 1989, page 171/172 XP000112429 see page 172, line 1 - line 6</p> <p>-----</p> <p>-/-</p>	1-5, 17-23

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search  10 August 1998	Date of mailing of the international search report  20/08/1998
Name and mailing address of the ISA  European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  Suendermann, R

## INTERNATIONAL SEARCH REPORT

Int'l. Appl. No.  
PCT/US 98/08236

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>MING OUHYOUNG ET AL: "The MOS multimedia E-mail system"</p> <p>PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON MULTIMEDIA COMPUTING AND SYSTEMS (CAT. NO.94TH0631-2), PROCEEDINGS OF IEEE INTERNATIONAL CONFERENCE ON MULTIMEDIA COMPUTING AND SYSTEMS, BOSTON, MA, USA, 15-19 MAY 1994, pages 315-324, XP002073636</p> <p>ISBN 0-8186-5530-5, 1994, Los Alamitos, CA, USA, IEEE Comput. Soc. Press, USA see abstract</p>	25-31
A	<p>EP 0 674 408 A (IBM) 27 September 1995 see abstract; claim 1</p> <p>see column 6, line 55 - column 7, line 32; figure 7</p>	1,17,25
A	<p>US 5 438 660 A (LEE RAYMOND E ET AL) 1 August 1995</p> <p>see column 1, line 52 - column 2, line 5 see abstract; claim 1; figures 1-5</p>	1,17,25

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International Application No

PCT/US 98/08236

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
EP 0674408 A	27-09-1995	US	5490244 A		06-02-1996
		JP	2625649 B		02-07-1997
		JP	7271689 A		20-10-1995
US 5438660 A	01-08-1995	EP	0564387 A		06-10-1993
		JP	2519385 B		31-07-1996
		JP	6083561 A		25-03-1994

THIS PAGE BLANK (USPTO)